


STAR

DIAMETRI E PIANEROTTOLI, DIAMETERS AND LANDINGS, DIAMÈTRES ET PALIERS

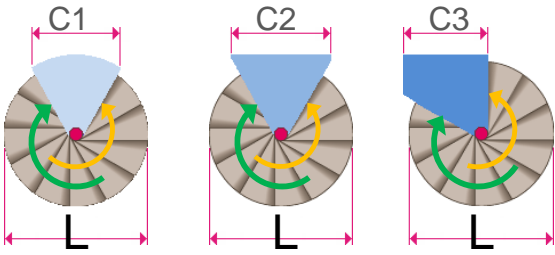


L	C1	C2	C3
1000	532	609	520
1100	578	660	570
1200	624	711	620
1400	716	813	720
1600	808	915	820

Diametri disponibili, senso di salita, forme e possibili pianerottoli d'arrivo con dimensione d'uscita per scale a pianta circolare e a pianta quadra.


Available diameters, staircase rotation, shapes and possible arrival landings with exit dimension for round and well staircases.

Diamètres disponibles, sens de rotation, formes et possibles paliers d'arrivée avec dimension de sortie pour escaliers ronds ou carrés.


FORO, WELL, TRÉMIE

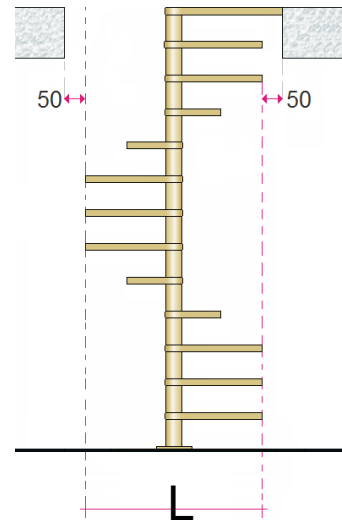

APERTURA GRADINI, TREADS OPENING, OUVERTURE DES MARCHES




L 1000 ÷ 1200
Y = 30°




L 1400 - 1600
Y = 27°

FISSAGGIO ARRIVO SBARCO, FIXING OF THE ARRIVAL LANDING, FIXATION DU PALIER D'ARRIVÉE








MIN 210

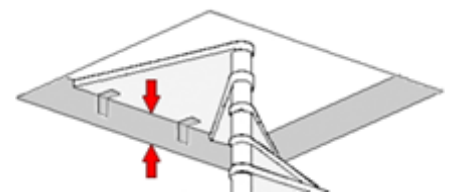


MIN 210

ALTEZZE E NUMERO GRADINI, FLOOR HEIGHTS AND TREADS NUMBER, HAUTEURS ET NOMBRE DES MARCHES - G11 ÷ G...

Ø 1000 ÷ 1600

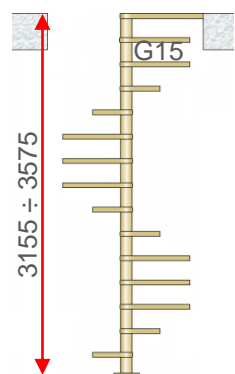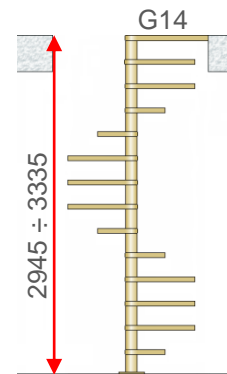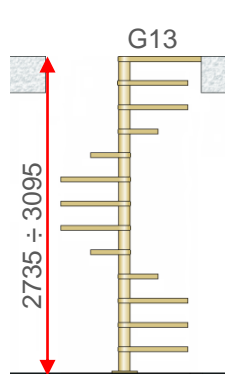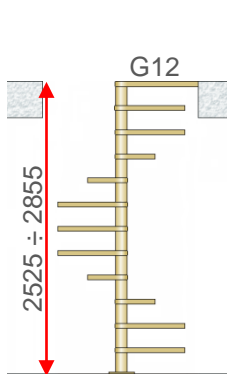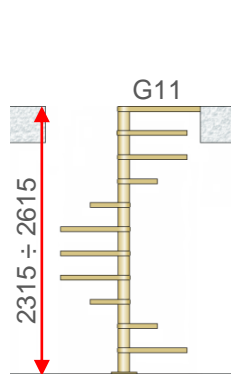

MIN 210 ÷ MAX 240



STAR

CARATTERISTICHE, FEATURES, CARACTÉRISTIQUES

STAR 04

CORRIMANO PVC GRIGIO
PVC HANDRAIL GREY
MAIN COURANTE PVC GRIS

RINGHIERA A COLONNE Ø 22mm


BANISTER WITH SPINDLES Ø 22mm

GARDE-CORPS AVEC
COLONNETTES Ø 22mm

METAL

PALO METAL
METAL CENTRAL POLE
POTEAU OU MÉTAL

PORTATA 200 Kg/m²
LOAD 200 Kg/m²
PORTÉE 200 Kg/m²

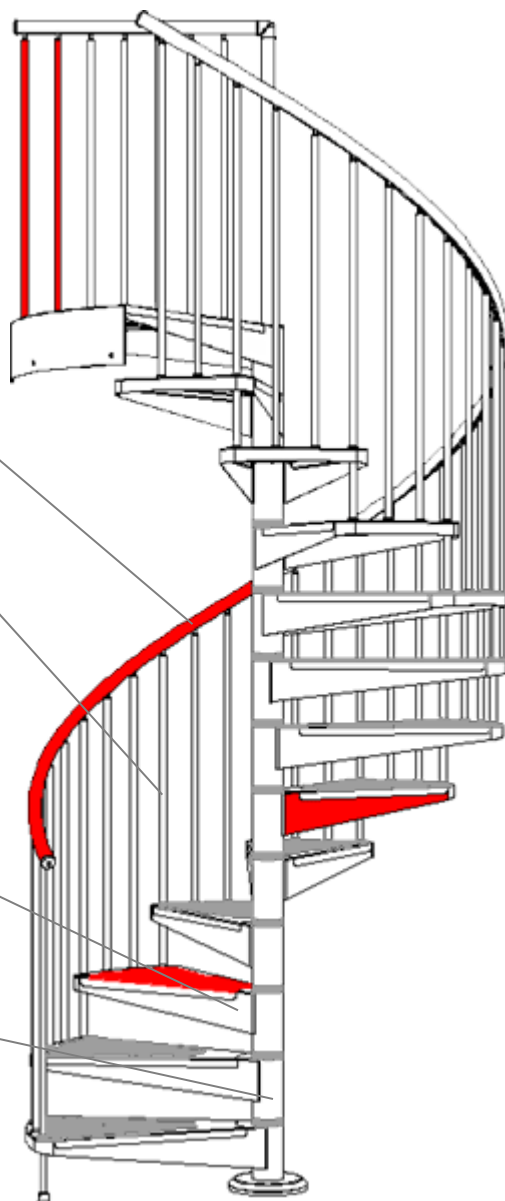

Ø 1100 ÷ 1600



SENSO DI SALITA: ORARIO E ANTIORARIO
USO INTERNO
STAIRCASE ROTATION: CLOCKWISE AND ANTICLOCKWISE
INTERNAL USE
SENS DE MONTÉE: HORAIRE OU ANTI-HORAIRE
USAGE INTÉRIEUR

STAR

CARATTERISTICHE, FEATURES, CARACTÉRISTIQUES

STAR FX


CORRIMANO PVC GRIGIO
PVC HANDRAIL GREY
MAIN COURANTE PVC GRIS

RINGHIERA A COLONNE Ø 22mm
E CAVI IN ACCIAIO Ø 4mm
BANISTER WITH SPINDLES Ø 22mm
AND STEEL WIRES Ø 4mm
GARDE-CORPS AVEC
COLONNETTES Ø 22mm
CABLES ET ACIER Ø 4mm

METAL

PALO METAL
METAL CENTRAL POLE
POTEAU OU MÉTAL

PORTATA 200 Kg/m²
LOAD 200 Kg/m²
PORTÉE 200 Kg/m²

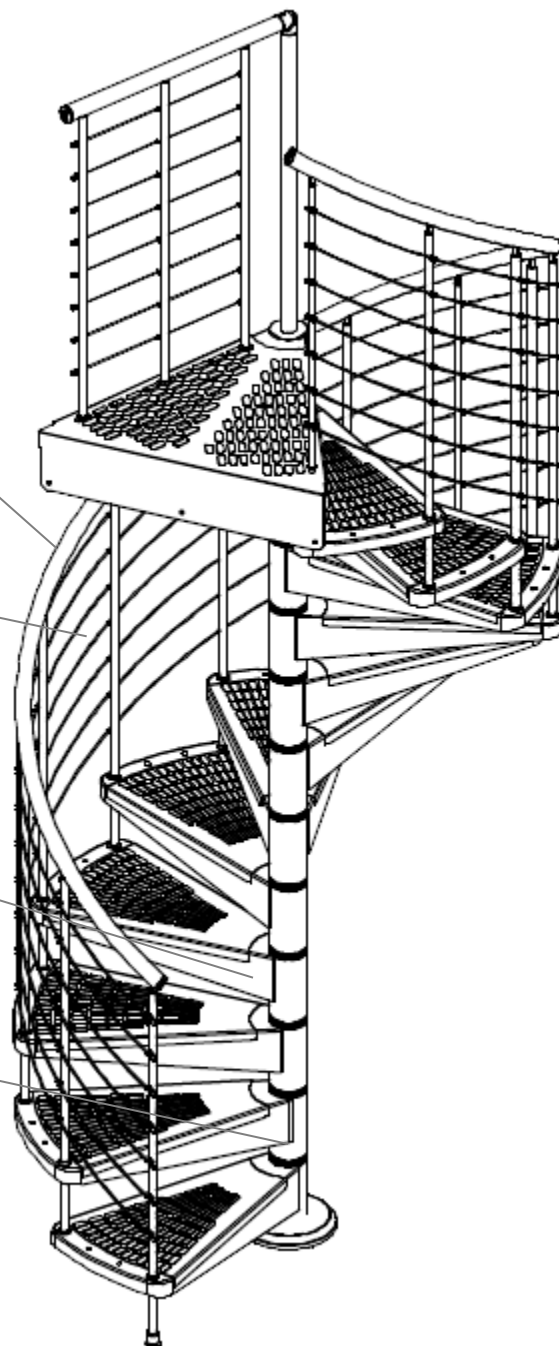


Ø 1100 ÷ 1600



SENSO DI SALITA: ORARIO E ANTIORARIO
USO INTERNO
STAIRCASE ROTATION: CLOCKWISE AND ANTICLOCKWISE
INTERNAL USE
SENS DE MONTÉE: HORAIRE OU ANTI-HORAIRE
USAGE INTÉRIEUR


STAR

BALAUSTRÉ PROTEZIONE FORO, FLOOR PROTECTION BALUSTRADE, GARDE-CORPS ÉTAGE POUR LA TRÉMIE

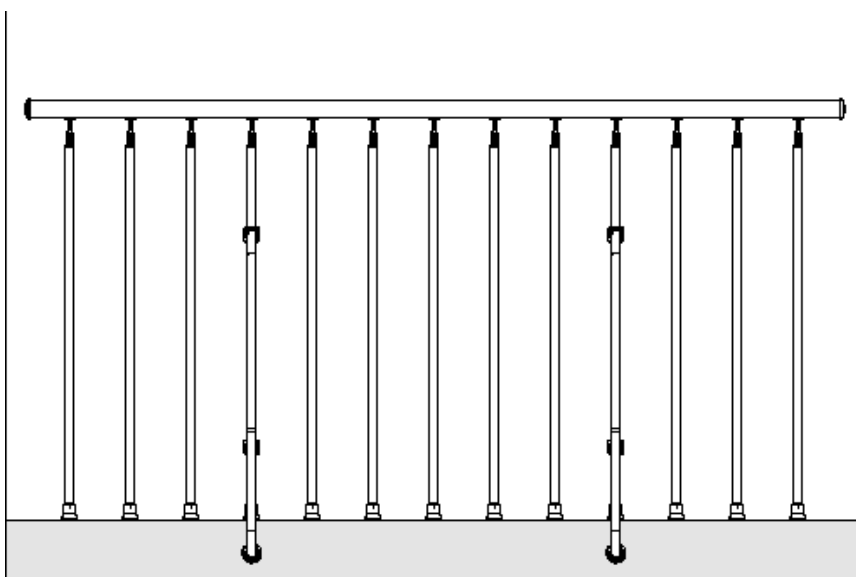

min 1000 mm

max 1000 mm

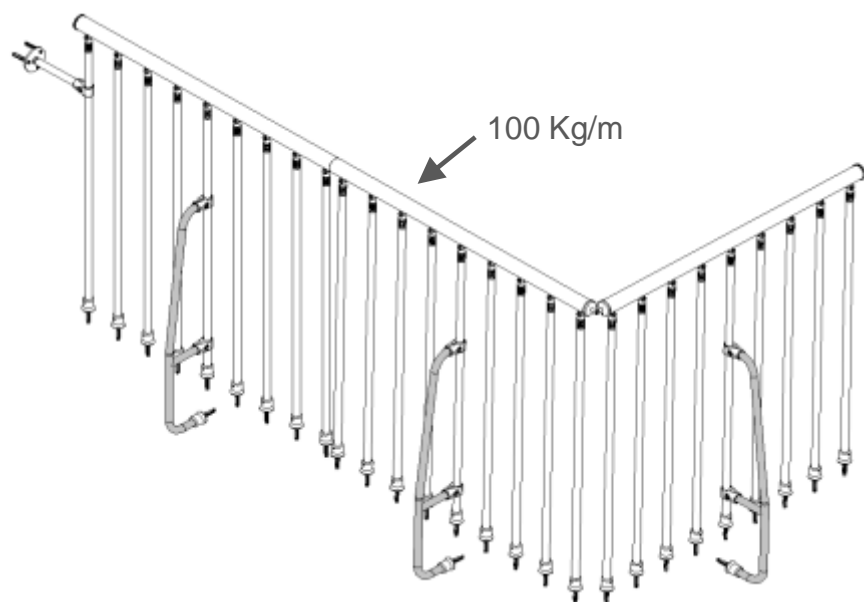

100 Kg/m

STAR 04




CORRIMANO OVC – PVC handrail - Main courante PVC




STAR

BALAUSTRE PROTEZIONE FORO, FLOOR PROTECTION BALUSTRADE, GARDE-CORPS ÉTAGE POUR LA TRÈMIE

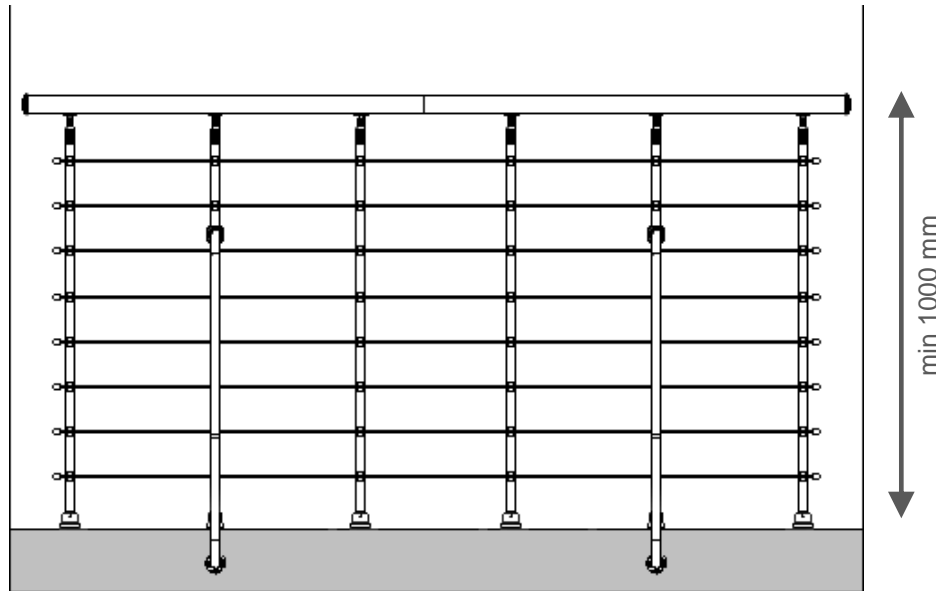

max 1000 mm

STAR FX

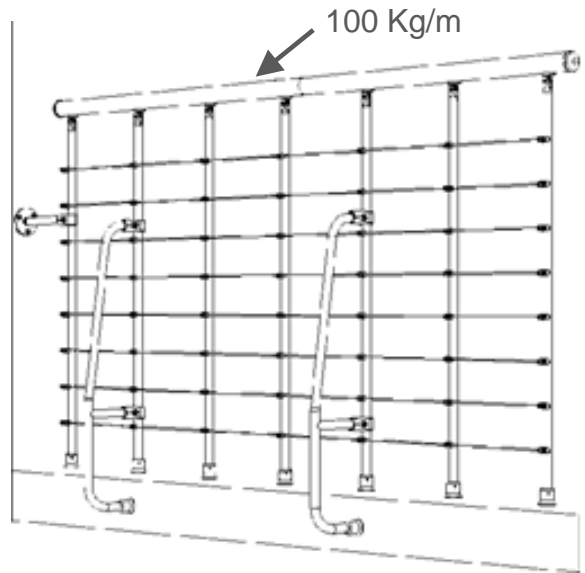

CORRIMANO OVC – PVC handrail - Main courante PVC

